

CABIN AIR FILTERS

Dust & Pollen Filter - RL


REMOVAL & INSTALLATION

NOTE: Manufacturer's terminology for this filter is dust and pollen filter.

CABIN AIR FILTER

Removal & Installation (2005-2006)


1. Remove the glove box housing. See **GLOVE BOX HOUSING** . Remove the dust and pollen filter assembly from the evaporator. See **Fig. 1** .

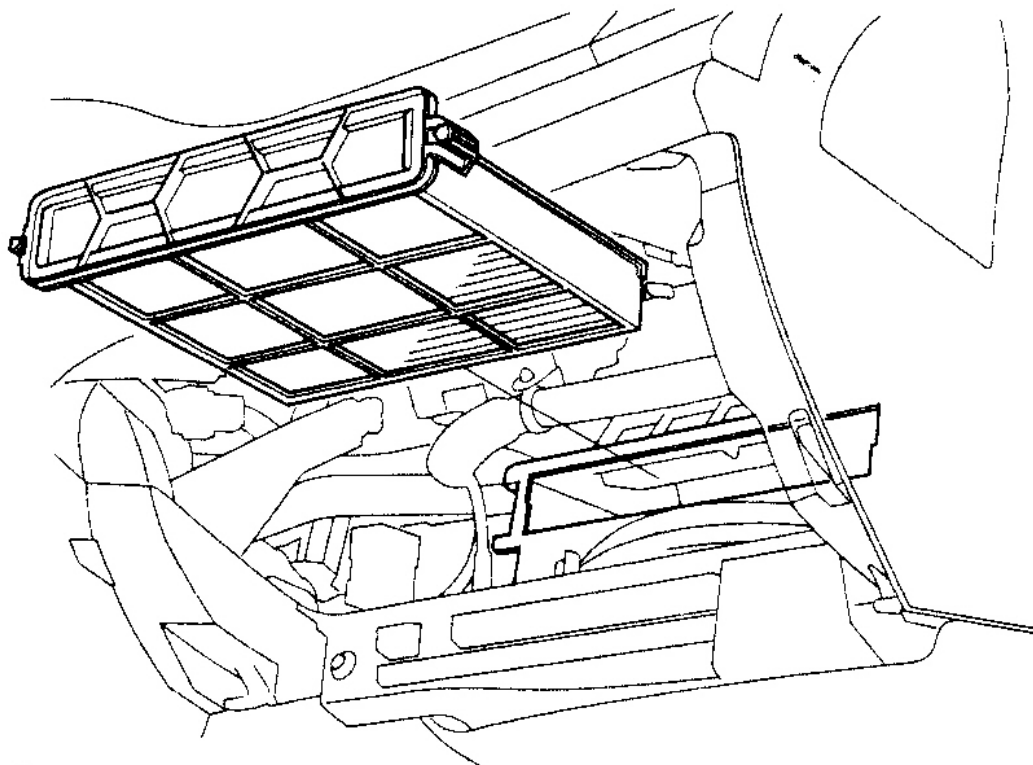

G00302615

Fig. 1: Removing Dust & Pollen Filter From Evaporator
Courtesy of AMERICAN HONDA MOTOR CO., INC.

2. Remove the filter (A) from the housing (B), and replace the filter. See **Fig. 2** .

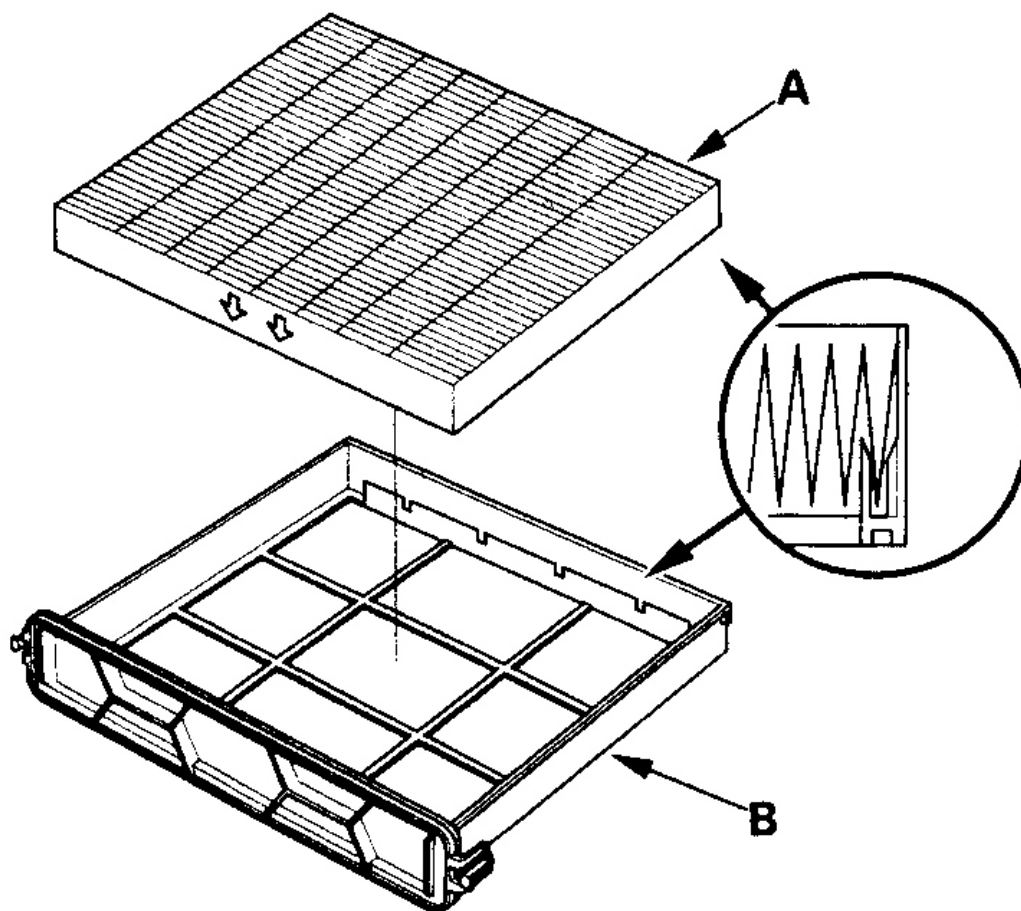

G00302616


Fig. 2: Removing Filter From Housing
Courtesy of AMERICAN HONDA MOTOR CO., INC.

3. Install the filter in the reverse order of removal. Make sure that there is no air leaking out of the evaporator.

GLOVE BOX HOUSING

Removal & Installation


1. Remove the passenger's dashboard under cover (A). Gently pull down the front edge to detach the clips (B). See **Fig. 3**. Disconnect the ambient light connector (C). Pull the cover away to release the pins (D) from the holders (E).

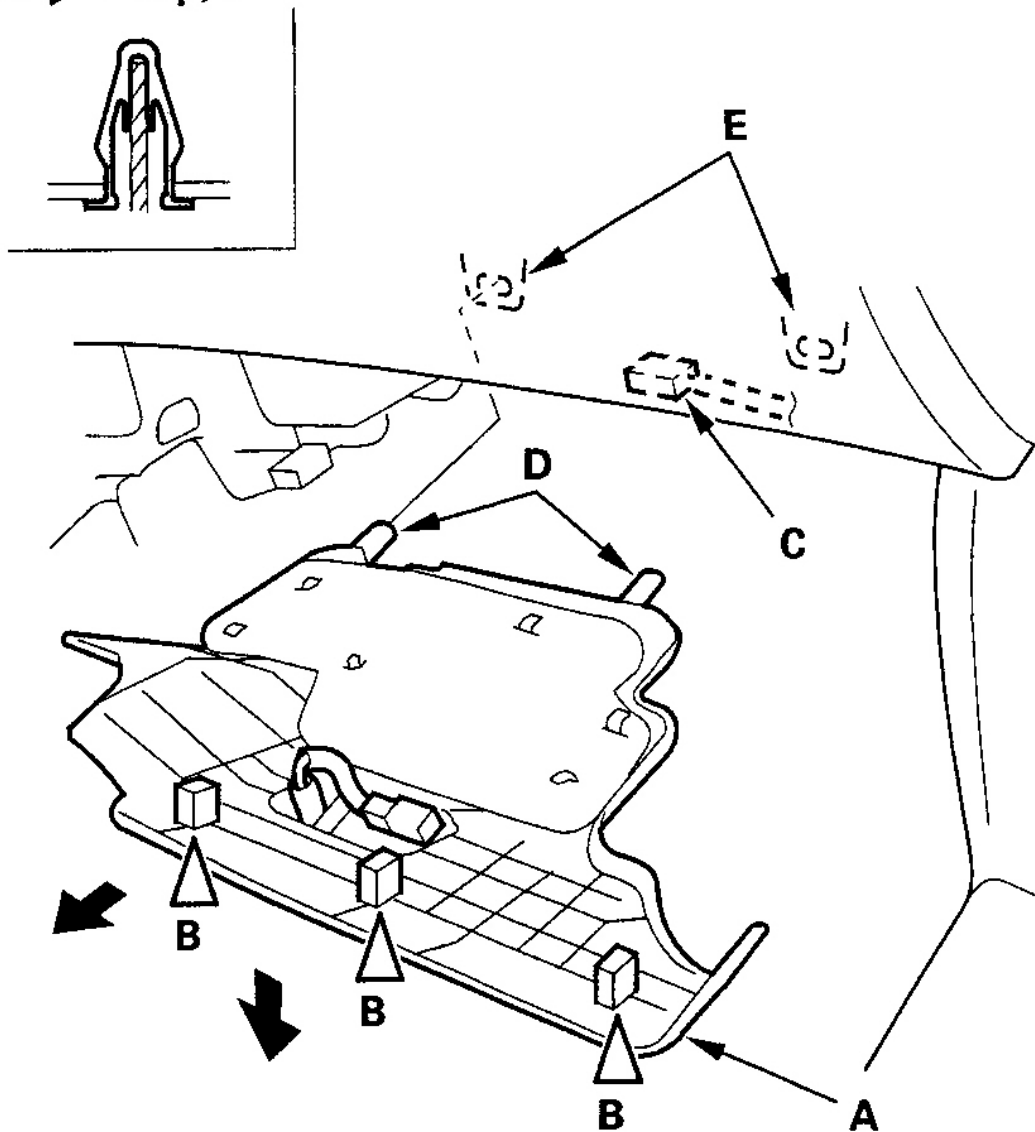Fastener Locations**B ▷ : Clip, 3**

G00401639

Fig. 3: Removing Passenger's Dashboard Under Cover
Courtesy of AMERICAN HONDA MOTOR CO., INC.

2. Open the glove box (A) and document tray (B). Remove the lid (C), then remove the screws (D) and bolt (E). See **Fig. 4**.

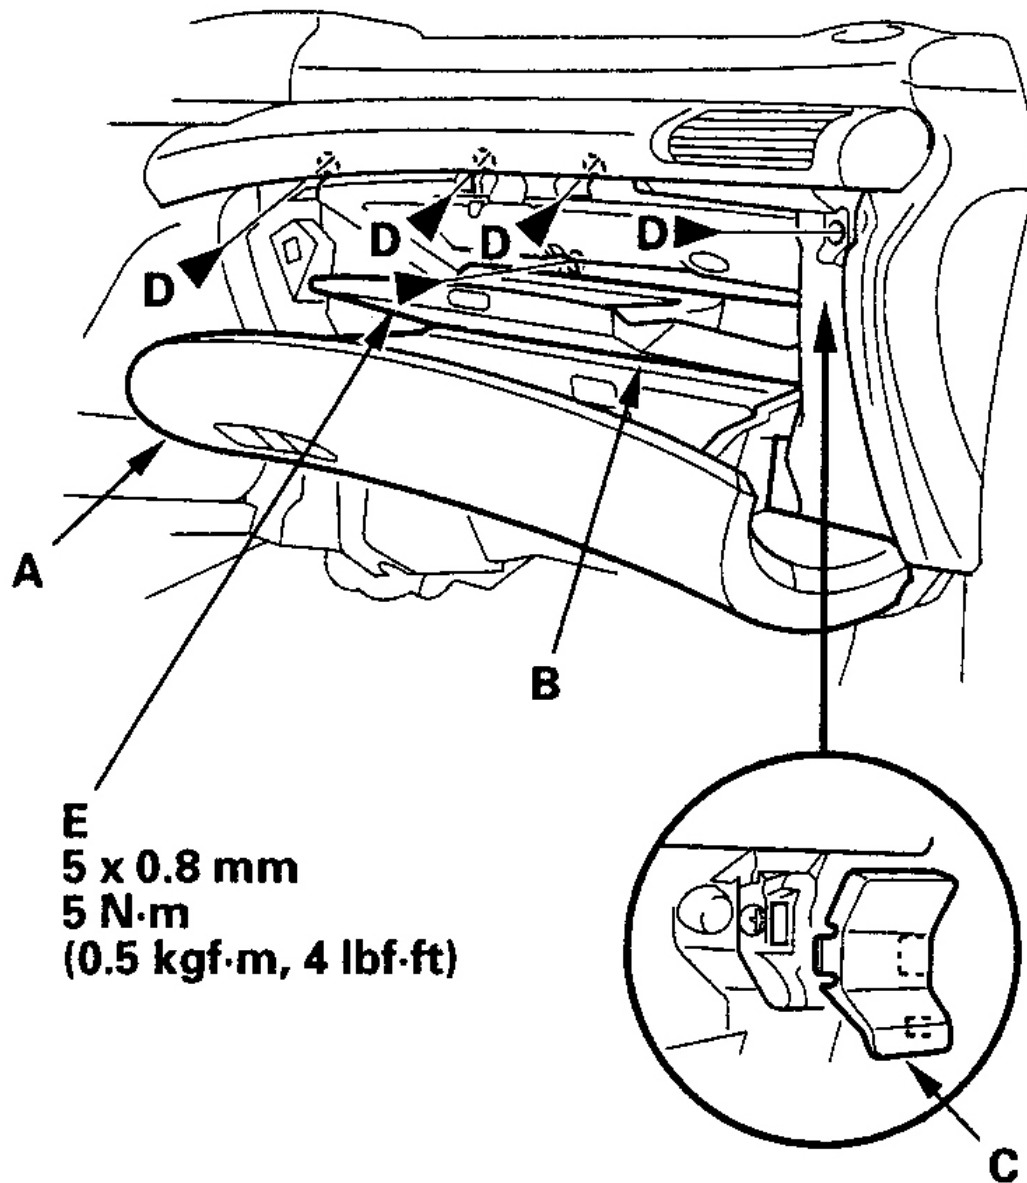



G00401640

Fig. 4: Removing Document Tray & Lid
Courtesy of AMERICAN HONDA MOTOR CO., INC.

3. Close the glove box (A), then remove the bolts from the lower edge. See **Fig. 5**.

Fastener Locations

► : Bolt, 3

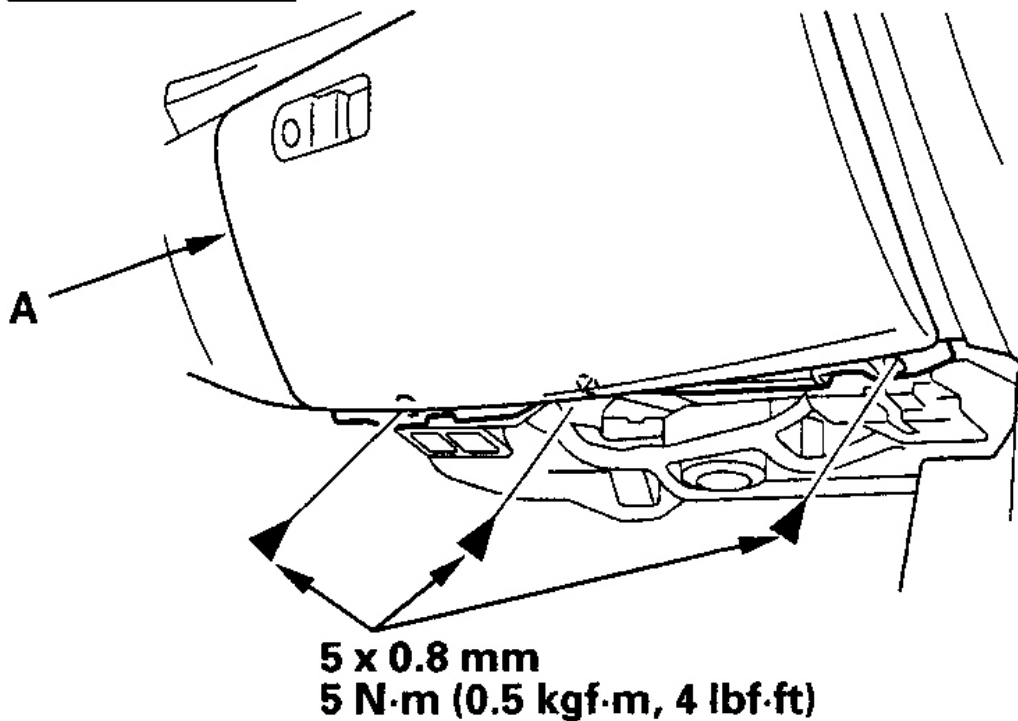

G00401641



Fig. 5: Removing Lower Glove Box Bolts

Courtesy of AMERICAN HONDA MOTOR CO., INC.

4. Remove the glove box (A). See **Fig. 6** . Pull out the glove box, then remove the clips (B). Remove the harness clip (C) and the ambient light bulb socket (D). Disconnect the trunk lid opener main switch connector (E).

Fastener Locations

B ▷ : Clip, 2

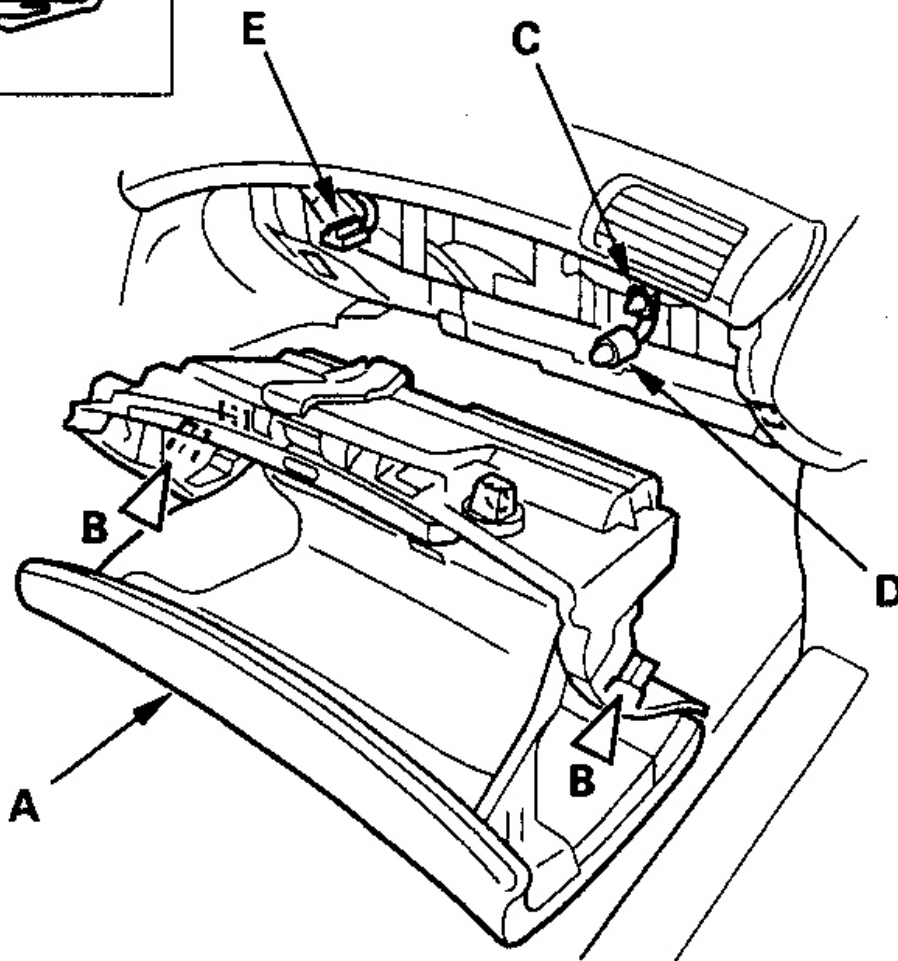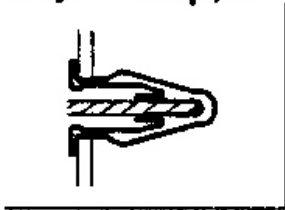

G00401642

Fig. 6: Removing Glove Box

Courtesy of AMERICAN HONDA MOTOR CO., INC.

5. Install the box in the reverse order of removal, and note these items: Replace any damaged clips. Push the clips into place securely. Make sure the connector is plugged in properly, and the bulb socket is connected securely. Take care not to scratch the passenger's front console cover.
6. Install the passenger's dashboard under cover in the reverse order of removal, and note these items: Replace any damaged clips. Push the clips into place securely. Make sure the connector is plugged in properly. Make sure the pins of the cover are installed securely to the holders.